

Biolumen

Agricontrol Unit


With a simple push button and LCD screen interface and manual override switches included, this controller provides accurate timing and dimming of up to 64 Biolumen PowerPods or other Biolumen compatible light sources.

Along with the specific spectra provided by Biolumen lighting units, this controller can be used to entrain animals' internal clocks, therefore regulating hormone production and improving welfare and productivity.

- Allows for simple programming using on, off and ramp times to mimic sunrise and sunset.
- 2 channels, allowing 2 separate programs to be run simultaneously.
- Manual override switches for each channel [100% On, Auto, User set low level and Off].
- No sudden light changes; eliminating the possibility of stress associated with light shock.
- Compatible with all Biolumen lighting.
- Can be used with other dimmable lighting [DALI or 0-10V – please specify when ordering].
- Simple user interface with push buttons and LCD screen.

Available separately

- Biolumen CV Power Pod
- Biolumen CC Power Pod
- Ecotoxic Cannons
- Biolumen Signal Bus Cable
- Biolumen Signal Bus 4m Extension Cable
- Biolumen Signal Bus 10m Extension Cable

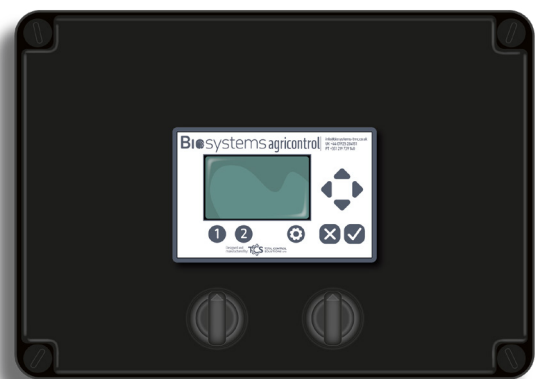

Dimensions

- A 22cm
- B 13.5cm
- C 31cm

Agricontrol Unit

Code	Product	Output	Input	Signal Output	Max. signal cable length (m)	Protection Class II
BLM-AGRICON	Agricontrol Unit	22V 250mA	100-240V 50/60Hz	Biolumen Protocol or 0-10V	300 (Biolumen Protocol)	IP54



UK
Solesbridge Lane
Chorleywood
Hertfordshire WD3 5SX
London

Call +44 01923 284151

Iberia
Rua Cidade de Paris 6
Parque Industrial do Arneiro
2660-456 São Julião do Tojal
Portugal

Call +351 219 739 140

biosystems-tmc.com

info@biosystems-tmc.co.uk

